


## LAYFLAT WATER TRANSFER

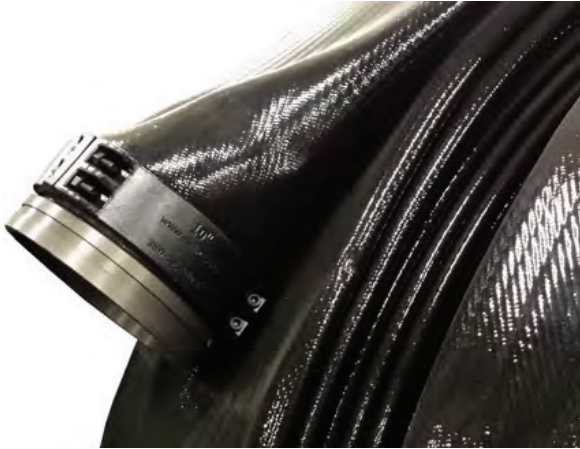

HEAVY DUTY POLYURETHANE LAYFLAT HOSE

|                         |   |
|-------------------------|---|
| <b>Application:</b>     | Construction sites, waste water industry, agriculture and mining, transport of abrasive materials, flexible pipeline even in extreme terrain, irrigation and sludge disposal, for heavy duty service under toughest conditions. Perfectly prepared for hydraulic fraction in shales and oil fields. |
| <b>Tube:</b>            | PU  |
| <b>Cover:</b>           | PU, Ribbed cover or smooth cover  |
| <b>Reinforcement:</b>   | Polyester-Nylon textile   |
| <b>Temperature:</b>     | -58°F to 176°F  |
| <b>Branding:</b>        | PU WATER TRANSFER   |
| <b>Color:</b>           | Black standard, blue, green, or red upon request  |
| <b>Package:</b>         | Rolled, packed on steel reel  |
| <b>Standard Length:</b> | 100 ft (30m), 200 ft (61m), 300 ft (91.5m), 330 ft (100m) 660 ft (200m)   |
| <b>Mfg. Technology:</b> | Through-the-weave-technology  |

| ID | NOM. OD | MAX WP  | BURST   | WALL THICKNESS | TENSILE STRENGTH | WEIGHT |
|----|---------|---------|---------|----------------|------------------|--------|
| IN | IN      | PSI/BAR | PSI/BAR | IN             | LBS              | LBS/FT |
| 4  | 4 3/16  | 200/13  | 600/39  | 0.150          | 22000            |        |
| 5  | 5 3/16  | 200/13  | 600/39  | 0.150          | 26400            |        |
| 6  | 6 5/16  | 200/13  | 600/39  | 0.150          | 33000            | 1.07   |
| 8  | 8 5/16  | 200/13  | 600/39  | 0.170          | 89000            | 2.01   |
| 10 | 10 3/8  | 200/13  | 600/39  | 0.170          | 100100           | 2.55   |
| 12 | 12 7/16 | 150/11  | 450/30  | 0.180          | 134000           | 3.62   |
| 16 | 16 7/16 | 100/8   | 300/20  | 0.190          |                  |        |