


## GLOBAL ORANGE SPIRAL SUCTION HOSE

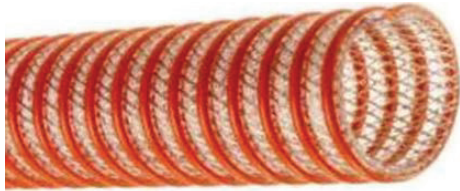

**Application:** Water suction and discharge hose for heavy duty applications requiring combined vacuum and higher working pressures. Perfect for rental/construction pumping..

**Tube:** Flexible PVC, smooth bore)

**Reinforcement:** Rigid PVC helix

**Cover:** Synthetic braiding, corrugated O.D.

**Temperature:** -13°F to 140°F

**Fittings:** Global QD, Camlock, NPT

ID INCHES	OD INCHES	BEND RADIUS AT 72°F inches	WEIGHT lbs./ft
3	3.70	4.0	0.70
4	4.78	6.3	1.13
6	7.17	7.1	1.74
8	9.34	10.2	3.88
12	13.66	24.8	8.68

PART NUMBER	DESCRIPTION	PSI RATING
601883000000	3" X 10' GLOBAL ORANGE SPIRAL SUCTION HOSE	100
601859000000	4" X 10' GLOBAL ORANGE SPIRAL SUCTION HOSE	75
601863000000	6" X 10' GLOBAL ORANGE SPIRAL SUCTION HOSE	50
601867000000	8" X 10' GLOBAL ORANGE SPIRAL SUCTION HOSE	*
601871000000	12" X 10' GLOBAL ORANGE SPIRAL SUCTION HOSE	*
601857000000	3" X 20' GLOBAL ORANGE SPIRAL SUCTION HOSE	100
601861000000	4" X 20' GLOBAL ORANGE SPIRAL SUCTION HOSE	100
601865000000	6" X 20' GLOBAL ORANGE SPIRAL SUCTION HOSE	50
601869000000	8" X 20' GLOBAL ORANGE SPIRAL SUCTION HOSE	*
601873000000	12" X 20' GLOBAL ORANGE SPIRAL SUCTION HOSE	*
601904000000	3" X 10' CAM LOCK ORANGE SPIRAL SUCTION HOSE	100
601908000000	4" X 10' CAM LOCK ORANGE SPIRAL SUCTION HOSE	75
601912000000	6" X 10' CAM LOCK ORANGE SPIRAL SUCTION HOSE	50
601916000000	8" X 10' CAM LOCK ORANGE SPIRAL SUCTION HOSE	*
601906000000	3" X 20' CAM LOCK ORANGE SPIRAL SUCTION HOSE	100
601910000000	4" X 20' CAM LOCK ORANGE SPIRAL SUCTION HOSE	75
601914000000	6" X 20' CAM LOCK ORANGE SPIRAL SUCTION HOSE	50
601918000000	8" X 20' CAM LOCK ORANGE SPIRAL SUCTION HOSE	*