

## GP445 SOUND ATTENUATED DIESEL GENERATOR



Standard Colors:  
Red or White

Global Pump generators are specifically designed to provide prime power or temporary power anywhere and anytime utility power is not available.

These compact, mobile, sound attenuated generators provide single- and three-phase power simultaneously for construction, commercial, industrial, emergency, and special event applications.

### FEATURES

Rugged design for portable power applications.

Heavy duty, direct injection Perkins diesel engine provides maximum reliability.

Brushless alternator with Permanent Magnet Generator (PMG) for superior motor starting.

Premium Automatic Voltage Regulator (AVR) with three-phase rms sensing for improved regulation and performance.

Automatic start/stop contacts allow the unit to start upon a signal from a transfer switch during a power failure.

Voltage selector switch allows an easy change to a wide variety of voltages. Fine tune to exact requirements by adjusting the voltage rheostat on the front control panel.

Sound attenuated, weather resistant, electrostatic powder painted, lockable enclosure with center lifting point for safe, unattended, quiet operation.

Simultaneous three-phase and single-phase output.

Cam-Lock connectors to provide a quick connection alternative.

Reduced operating cost with 500 hour service intervals and fuel-efficient diesel engines.

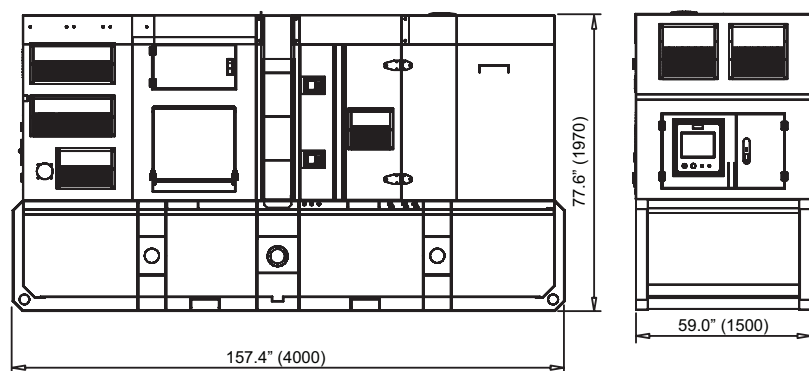
Large internal fuel cell for extended run times between refueling.

Environmentally-friendly skid with 110% fluid containment and forklift pockets.

Easy-to-read digital controller with safety shutdowns for safe, accurate generator and engine monitoring.

Trailer with flush mount DOT lighting, safety chains, adjustable height couple, and electric brakes.

EPA emission compliance to 40 CFR 1039.625.

**GENERATOR DATA**

Model	GP445-SA376
Rated Standby Power @ .8pf	390 kW (487 kVA)
Rated Prime Power @ .8pf	355 kW (443 kVA)
3Ø Voltage Selections	Switchable 208/120, 220/127, 240/139 480/277, 460/266, 440/254
1Ø Voltage Selections	120/240
Amperage Capacity @ 208V 1Ø	1,225 Amps X 2 (Zigzag)
Amperage Capacity @ 240V 1Ø	1,065 Amps (Zigzag)
Amperage Capacity @ 480V 3Ø	532 Amps
Connection Terminals and Receptacles	3-Single row mechanical lug, hex head 3-Single row color coded Cam Locks 2- 20A, 120V GFCI, NEMA 5-15R 3- 50A, 250V, CS6369
Sound Level Full Load @ 23'	74 db(A)
Fuel Cell Capacity	290 gallons (1,098 liters)
Fuel Consumption	gph (lph)
100% load	24.8 (94)
75% load	19.2 (73)
50% load	13.7 (52)
25% load	8.1 (31)
Controller	Deepsea 7310
Safety Protection	Water Temp, Oil Pressure Emergency Stop Button kW/kVA/Amp Parameter Monitoring Battery Disconnect Lockable Voltage Selection Generator Output Protection

**ENGINE**

Engine Make	Perkins
Engine Model	2206D-E13TAG2
Emissions Compliance	EPA Tier III
Design	6 Cylinder, 4-cycle, water cooled, direct injection, turbocharged
Displacement	12.5 liter
Rated Speed	1,800 rpm
Gross Engine Power Output	620 HP (462 kW)
Oil Capacity	10.5 gal (40 L)
Battery	24V 150Ah x 2

**ALTERNATOR**

Model	Stamford UCI444E
Excitation	Brushless with PGM
Automatic Voltage Regulator	Stamford MX321
Frequency	60 Hertz
Voltage Regulation	±0.5%
Frequency Regulation	±0.25%
Insulation	Class H
T.I.F.	<50

**SKID DIMENSIONS**

Length	157.4" (4,000 mm)
Width	59.0" (1,500 mm)
Height	77.6" (1,970 mm)
Weight (dry)	11,574 lbs (5,250 kg)

**TRAILER OPTIONS**

Standard Single Axle  
Electric/Surge Brakes  
DOT Approved Recessed Lighting



**GLOBAL PUMP**  
10162 East Coldwater Road, Davison, MI 48423  
Tel: 810.653.4828 Fax: 810.658.0632  
**1.866.360.PUMP** [www.globalpump.com](http://www.globalpump.com)